




Double Sided Tissue Tape

Description

Naikos Double Coated Tissue Tape is a double sided tape with acrylic adhesive on a tissue carrier that provides dimensional stability, improved handling and ease of die-cutting and laminating. The adhesive provides excellent peel strength adhesion, with good holding power to a variety of surfaces.



Construction

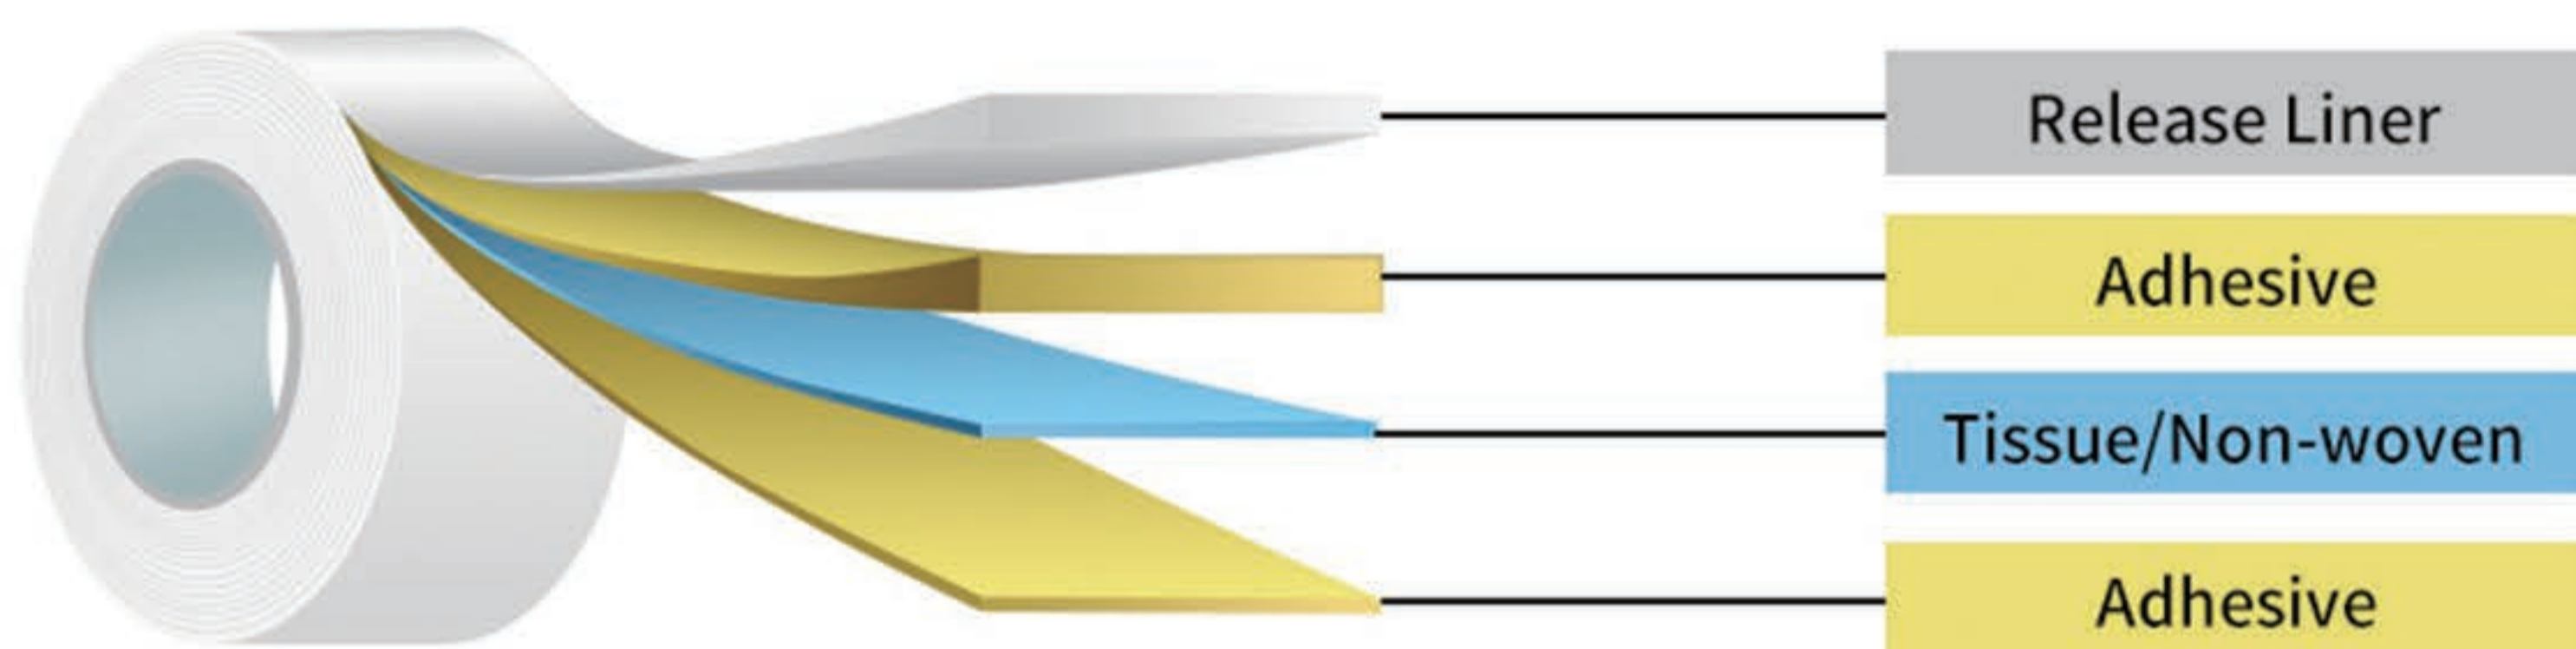

Features

- * Excellent adhesion to a variety of polar surfaces
- * Excellent weather resistance and chemical resistance
- * Good anti-aging, high adhesion
- * Suitable for permanent applications

Application

- * Automotive industry
- * Posters, displays
- * Splicing of paper and film
- * Mounting of nameplates and signs
- * Computer & Electric components bonding
- * Office stationery
- * Leather products
- * Furniture parts



Mounting Leather Products



Sticking Furniture



Automotive industry



Nameplate Lamination



Decoration



Advertising

Properties

Item	NKS-##DT	NKS-##DTS	NKS-##DTH	NKS-##DTW
Color	Translucent	Translucent	Translucent	Translucent
Carrier	Tissue/Non-woven	Tissue	Tissue	Tissue
Adhesive	Acrylic Adhesive	Solvent Based Acrylic Adhesive	Holt Melt Adhesive	Water Based Adhesive
Total Thickness	0.1~0.16 mm(3.9~6.3 mil)	0.07~0.16 mm(2.75~6.3 mil)	0.06~0.14 mm(2.35~5.5 mil)	0.07~0.14 mm(2.75~5.5 mil)
Adhesion to Stainless Steel	≥14 N/25mm(≥50 oz/inch)	≥14 N/25mm(≥50 oz/inch)	≥14 N/25mm(≥50 oz/inch)	≥14 N/25mm(≥50 oz/inch)
Holding Power	≥24 Hr	≥24 Hr	≥24 Hr	≥ 24Hr
Temperature Resistance	80~160°C(170~320°F)	80°C(176°F)	60°C(140°F)	60°C(140°F)
Width	2~1020/1240 mm(Customized Width Available)			
Length	50/100/200/1000/1200 m(Customized Length Available)			